

# eFill Compact Dispenser Duo




# DETROIT<sup>®</sup>

eFill

## OVERVIEW:

Detroit eFill chargers are engineered for ultimate reliability in the most demanding conditions. Customizable charging configurations offer the efficiency and seamless integration you expect from Detroit, providing exceptional value for your EV infrastructure.

The eFill Compact Dispenser Duo features a space-saving design and a streamlined user interface that's ideal for small-footprint depots.

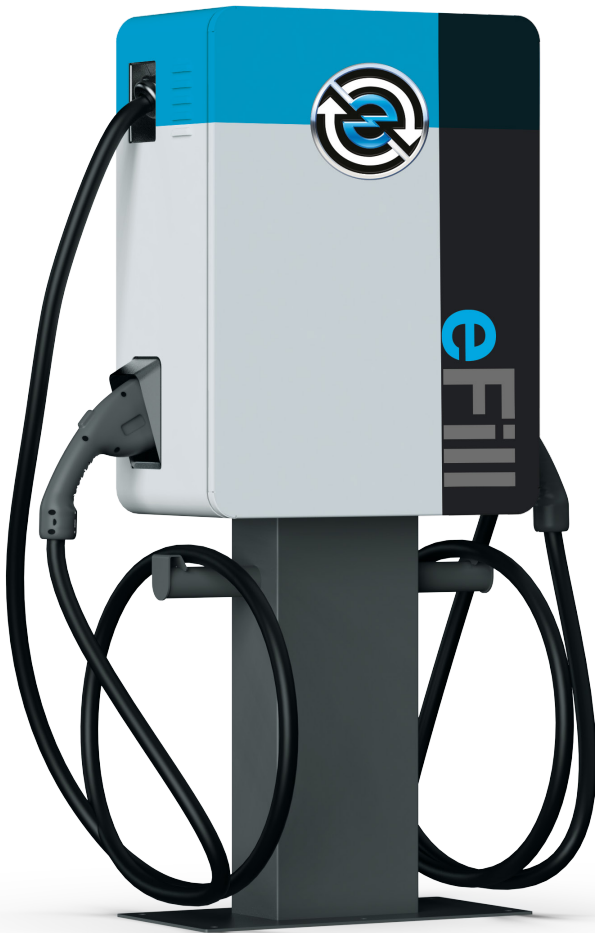

Maximum continuous current CCS [A]	200	300
Power range [kW]	up to 80kW <sup>[1]</sup>	up to 120kW <sup>[1]</sup>
Voltage range [V]	150 - 1000	
Available connectors	CCS-1	
Interface	Status LED Indicator Button to stop charging E-stop pushbutton RFID (optional)	
Protections	Isolation monitor	
Cable length [ft]	13.1 (optionally, 18 or 25)	
Degree of protection	NEMA 3R	
Enclosure / pedestal color	White (RAL 9016) / Grey (RAL 7016)	
Operating Temperature	From -30°C to 50°C	
Relative humidity	4% - 95%	
Maximum altitude (above sea level)	2000 m (optionally, max. 3000 m)	
Dimensions (W x D x H) [ft]	1.97 x 0.98 x 2.62 (4.74 with pedestal)	
Regulations	UL 2202, NEC 625, FCC Part 15 Class A	

<sup>[1]</sup> on eCascadia